

Crystaltechno Ltd. offers


Eye-safe Laser Rangefinder “LRF-2 L-20”

KTP OPO with Nd:YAG laser pumping is used. PC controlled, wide temperature range operation

“LRF-2 L-20”

Two built-in TV view finders
View finders FOV – 6° and 1.5°

- Operating laser wavelength 1.57 μm (option 1.06 μm)
- Laser energy per pulse (15...25) mJ for 1.57 μm
(80...100) mJ for 1.06 μm
- Laser beam divergence 0.7 mrad
- Diameter of receiving optics 90 mm
- Measured distance (150...30 000) m (small size target)
- Pulse repetition rate up to 5 Hz
- Range measurement accuracy 1 m
- Range resolution 15 m
- Number of detected targets 3, range gating
- RS 422, RS 232 interface
- Long time operation, not liquid cooling system
- Supply voltage (22...32) V DC
- Dimensions 145x200x290 mm
- Weight 12 kg
- Operating temperature (-30...+55) °C
- Shocks and vibration resistant

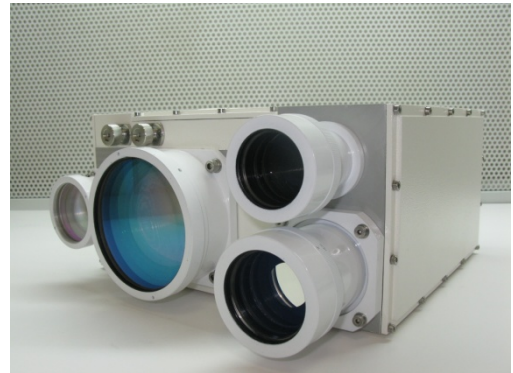

If you are interested please feel free to contact us! You can receive the additional information

e-mail: sales@crystaltechno.com